

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 January 2004 (15.01.2004)


PCT

(10) International Publication Number
WO 2004/005770 A2

- (51) International Patent Classification⁷: **F16J** [GB/GB]: 51 Charlton Brook Crescent, Chapeltown, Sheffield, S Yorks S35 2XR (GB)
- (21) International Application Number: PCT/GB2003/002941 (74) Agent: **HARRISON GODDARD FOOTE**; Belgrave Hall, Belgrave Street, Leeds LS2 8DD (GB).
- (22) International Filing Date: 8 July 2003 (08.07.2003)
- (25) Filing Language: English (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (26) Publication Language: English
- (30) Priority Data: 0215750.1 8 July 2002 (08.07.2002) GB (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, 0221729.7 19 September 2002 (19.09.2002) GB
- (71) Applicant (*for all designated States except US*): AES ENGINEERING LIMITED [GB/GB]; Mill Close, Bradmarsh Business Park, Templeborough, Rotherham, S. Yorks S60 1BZ (GB).
- (72) Inventor; and (75) Inventor/Applicant (*for US only*): **RODDIS, Alan**

[Continued on next page]

(54) Title: ROTARY SEAL

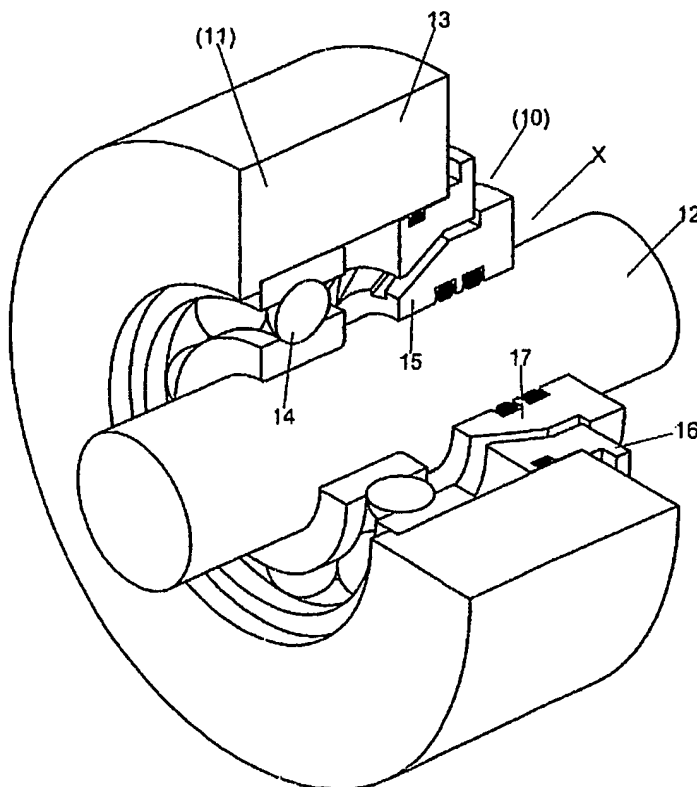

(57) **Abstract:** A mechanical seal has an axially floating seal face (21) in sliding contact with an axially stationary seal face (22). A biasing means (33), such as a magnet, biases the floating seal face towards the stationary seal face. The axially floating seal face and the biasing means are rotationally fixed relative to each other and the axially stationary seal face is free to rotate relative to the axially floating seal face. The seal may be used, for instance, as a bearing protector or isolator.

WO 2004/005770 A2



SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *without international search report and to be republished upon receipt of that report*